

12x of 17-9-20

Work Order ID 166317

166317

Page 2

Friday, September 15, 2017 9:00:29 AM

Item ID: D4085-3 Accept *N900040100* Setup Start *NS1*
 Revision ID: Stop *NS2*
 Item Name: Placard
 Start Date: 9/18/2017 Start Qty: 12.00 *12* Cust Item ID:
 Required Date: 9/21/2017 Req'd Qty: 12.00 *12* Customer:
 Reference:

Approvals: Process Plan: _____ Date: _____ Tooling: _____ Date: _____ Run Start *NR1*
 QC: _____ Date: _____ SPC (Y/N): _____ Date: _____ Stop *NR2*

Sequence ID/ Work Center ID	Operation Description	Set Up/ Run Hours	Tool ID	Tool #	Plan Code	Accept Qty	Reject Qty	Reject Number	Insp. Stamp
120 *120* QC Quality Control	QC6- All purchased or subcontracted products Memo	0.00 0.00					DAS 27 9-89		
				12			SEP 21 2017		
130 *130* Packaging Packaging	Identify as per dwg & Stock Location: <u>ST074</u> Memo ***ONE YEAR EXPIRED DATE FROM RECEIVING: <u>SEP 21 2017</u> ***	0.00 0.12							
						12	SEP 21 2017		
140 *140* QC Quality Control	QC21- Final Inspection - Work Order Release Memo	0.00 1.20					DAS 21 9-89		SEP 21 2017

Wm 17/20/19
17/9/20

Friday, September 15, 2017 9:00:29 AM

Page 1

166317

D4085-3

Required Date: 9/21/2017


Required Qty: 12.00

Component Item ID/ Item Name	Replacement Item ID	Mfg/ Purch	Bin Item	Primary Location	Last Location	Route Seq ID	Unit of Measure	Qty on Hand	Qty per Kit	Total Qty	Qty Issued	Date Issued	Status
---------------------------------	------------------------	---------------	-------------	---------------------	------------------	-----------------	--------------------	----------------	-------------	--------------	---------------	----------------	--------

12

Placard, Instructions

12x SP79-20

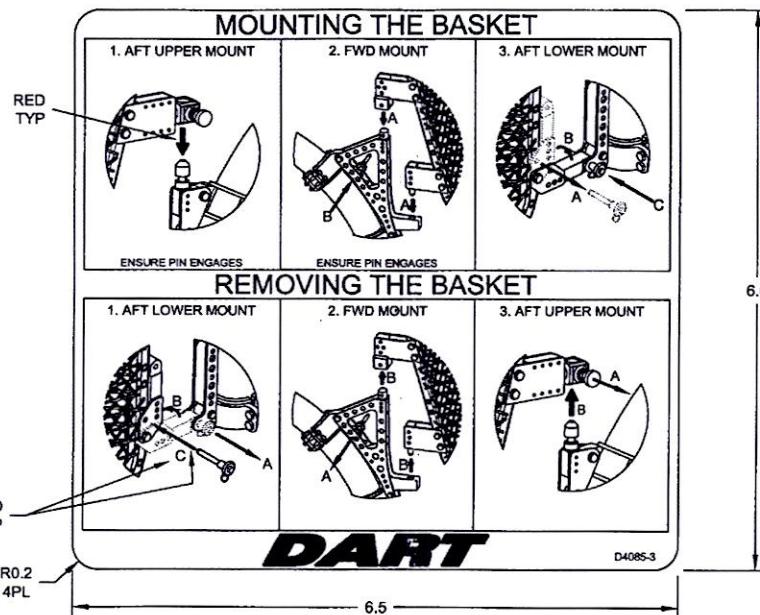

D4085-3 PLACARD, INSTRUCTIONS

NOTES:

- 1) MATERIAL: BLACK LETTERS AND GRAPHICS WITH RED ARROWS AND LOGO ON WHITE BACKGROUND AND ADHESIVE BACK.
MANUFACTURED FROM 3M, 7 MIL MASKING FILM #8522CP OR AVERY IPM #2031
- 2) FINISH: N/A
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: N/A
- 6) IDENTIFICATION: N/A
- 7) WEIGHT: N/A
- 8) USE FILE D4085-3C.eps FOR GRAPHICS

SHOP CO
RETURN
ENGINEER
UNCONTROLLED
SUBJECT TO AMENDMENT
WITHOUT NOTICE
WORK OF
NO. 16697

SEP 15 2017

RELEASED
2010-07-16

DESIGN	DPH	DART AEROSPACE LTD	
DRAWN		HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. C
MFG. APPR.	N/A	D4085	SHEET 2 OF 2
APPROVED		TITLE	SCALE
DE APPR.		PLACARD, INSTRUCTIONS	NT
DATE	10.06.25	COPYRIGHT © 2010 BY DART AEROSPACE LTD	
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.			



Dart Aerospace Ltd.
1270 Aberdeen Street
Hawkesbury, ON K6A 1K7
Tel: 613 632 9577
Fax: 613 632 1053

PURCHASE ORDER

Purchase Order ID PO37790

Purchase Order Date 9/15/2017

PO Print Date 9/15/2017

Page Number 1 of 2

Order From :

VC-STU001

Ship To : DART AEROSPACE LTD

STUDIO DE LETTRAGE 2001
210 MAIN WEST
HAWKESBURY, ON K6A 2H6
CA

1270 ABERDEEN
HAWKESBURY, ON K6A 1K7
CANADA

E-MAILED
2017/09/15

Contact Name

Vendor Phone 613 632 5449

Ship To Contact

Ship To Phone

Ship Via: Yours ppd

Ship Acct:

Buyer

Diane Baker

Customer POID

Customer Tax # 10127-2607

Terms

Net 30

Currency

CAD

FOB

Destination-Collect

Line Nbr	Reference Vendor Part Number Line Comments Delivery Comments	Description/ Mfg ID	Req Date/ Taxable CD Promise Date	Req Qty/ Unit of Measure	PO Unit Price	Extended Price
1	D4085-3P As per Dwg D4085 Rev. C B166317	Placard, Instructions	9/20/2017 Yes 9/20/2017	12.00 Each	\$13.33	\$160.00
Line Total:						\$160.00
2	71401-45	PROCUREMENT QUALITY CLAUSES	9/20/2017 No 9/20/2017	1.00	\$0.00	\$0.00
Procurement Quality Clauses A005 right of entry A012 chemical and physical test report A016 personnel qualification A017 raw material identification (as applicable) A026 certification of material conformance A041 quality management system A042 dart notification by supplier A043 retention of quality document						

SPD-9-20

Note:

9/15/2017

studio sl2

210 Main West
Hawkesbury, Ontario K6A 2H6
Canada

INVOICE

Invoice No.: 44890
Date: 09/20/2017
Ship Date:
Page: 1
Re: Order No.

Sold to:

Dart Aerospace Ltd

1270 Aberdeen
Hawkesbury, Ontario
K6A 1K7

Ship to:

Dart Aerospace Ltd

1270 Aberdeen
Hawkesbury, Ontario
K6A 1K7

Quantity	Description	Base Price	Disc. %	Unit Price	Amount
12	D4085-3P. PO 37790 Attn: Diane Baker	13.33		13.33	159.96
	Subtotal:				159.96
	H - HST HST				20.79
Thank you for your business / Merci de faire affaire avec nous					
Shipped By:				Total Amount	180.75
Comment: WO21012				Amount Paid	0.00
Sold By:				Amount Owing	180.75

HST #: 825007651RT0001

Sp 17-9-20

******CERTIFICATE of CONFORMITY******

Customer:

Studio SL2

Purchase Order N°:

PO 37790

Packing Slip N°:

W021012

Part N°:

Serial N°:

Description:

D4085-3P

Quantity:

12

Certification:

We hereby certify that:

1. The above listed items were manufactured, repaired and/or inspected in accordance with applicable drawings and/or specifications;
2. All work was accomplished in accordance with the Dart Aerospace Purchase Order;
3. Results of all inspections, chemical or physical tests, as well as other evidence, which shows the acceptability of raw materials, parts and/or assembly components are on file and available for inspection at any time.

Authority:

3m

1 year shelf life

APPROVAL:

Valerie Young

DATE:

Signature:

Val Y

Sept 20.17.

Title:

office administrator

IJ35-10
IJ35-20**Quick Links**

[3M Graphics Warranties](#)
[Technical Information Selector](#)
[Safety Data Sheets \(SDS\)](#)
[Flammability \(ASTM E84 Reports\)](#)
[Videos](#)

Product Description

- For Solvent, Eco-Solvent UV and Latex Inkjet Printing and Screen Printing
- 3.2-mil vinyl film

Product Features

- Available in gloss and matte finishes
- Pressure-sensitive adhesive
- Permanent
- Expected Performance Life of 5 years (unwarranted period for unprinted film with no graphic protection, applied to a flat, vertical, outdoor surface)

Recommended Types of Graphics and End Uses

- Short to long-term, indoor and outdoor promotional graphics
- Signs, trade show and point-of-purchase displays
- Exhibits and architectural applications

Graphic Protection

Graphic protection can improve the appearance, performance and durability of your graphic. Always use only the graphic protection options recommended in this Bulletin for this film.

- [3M™ Scotchcal™ Gloss Overlamine 8508](#)
- [3M™ Scotchcal™ Luster Overlamine 8509](#)
- [3M™ Scotchcal™ Matte Overlamine 8510](#)

Characteristics

These are typical values for unprocessed product. Processing may change the values.

Physical Characteristics

Characteristic	Value
Material	Vinyl
Film Color	White, opaque
Thickness	Without adhesive: 3.25 mil (0.081 mm) With adhesive: 4.0 mil (0.102 mm)
Adhesive	Pressure sensitive
Adhesive Color	Gray
Liner	Polycoated paper
Flammability	ASTM E84 reports: IJ35-10 and IJ35-20 , or go to the On-line Product Catalog at 3Mgraphics.com

Application Characteristics

Characteristic	Value
Finished Graphic Application Recommendation	Surface type: Smooth, flat and simple curved surfaces Substrate type: Metal, rigid plastic and painted surfaces Application temperature: 40° – 100°F (4° – 38°C) air and substrate Application method: Dry
Temperature Range After Application	-59 °F to +192 °F (-50 °C to +90 °C) (not for extended periods of time at the extremes)
Graphic Removal	Permanent

Warranty Information

Warranty Coverage Overview

The warranty coverage for eligible graphics is based on the user both reading and following all applicable and current 3M Graphics Product and Instruction Bulletins. The warranty period for eligible graphics is as stated in the 3M Graphics Warranties Matrices at the time that the film was purchased. Information found at 3MGraphics.com/warranties includes:

- [3M Graphics Warranties Bulletin](#)
 - This bulletin contains information on limitations and exceptions, and warranty period reductions for 3M Graphics Warranties. The warranty period may be reduced and stipulations may apply for certain constructions, applications, and graphic exposures as covered in this Bulletin.
- [3M Graphics Warranties Selector](#)
 - Use this selector to search for your vertical warranty period by product type, ink type, film name, and/or ink/printer platform.
- [U.S. Desert Southwest Region Map](#)
 - Use this map of hot, arid desert areas to determine if you are subject to reduced warranted durabilities.

The warranties set forth in this Bulletin are made in lieu of all other express or implied warranties, including any implied warranty of merchantability, fitness for a particular purpose, or arising out of a course of dealing, custom, or usage of trade.

3M Basic Product Warranty

3M Graphics Products are warranted to be free of defects in materials and manufacture at the time of shipment and to meet the specifications stated in its applicable 3M Graphics Product Bulletin and as further set forth in the [3M Graphics Warranties Bulletin](#).

Limited Remedy

The limited remedy applicable to each warranty is addressed in the 3M Graphics Warranties Bulletin found at 3MGraphics.com/warranties.

Limitation of Liability

Except where prohibited by law, 3M SHALL NOT UNDER ANY CIRCUMSTANCES BE LIABLE TO PURCHASER OR USER FOR ANY DIRECT (EXCEPT FOR THE LIMITED REMEDY PROVIDED IN THE 3M GRAPHICS WARRANTIES BULLETIN), INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, LABOR, NON-3M MATERIAL CHARGES, LOSS OF PROFITS, REVENUE, BUSINESS, OPPORTUNITY, OR GOODWILL) RESULTING FROM OR IN ANY WAY RELATED TO 3M'S GRAPHICS PRODUCTS, SERVICES, or THIS BULLETIN. This limitation of liability applies regardless of the legal or equitable theory under which such losses or damages are sought.

Additional Limitations

See the 3M Graphics Warranties Bulletin at 3MGraphics.com/warranties, for terms, additional limitations of your warranty, if any, information on reduced warranties for different exposures, and limitations of liability.

Factors that Affect Graphic Performance Life

The actual performance life of a graphic is affected by:

- the combinations of graphics materials used.
- complete ink drying or curing.
- selection, condition and preparation of the substrate.
- surface texture.
- application methods.
- angle and direction of sun exposure.
- environmental conditions.
- cleaning or maintenance methods.

Graphics Manufacturing

CAUTION

Before using any equipment, always read the manufacturer's instructions for safe operation.

Inkjet Printing

Always read and follow the ink manufacturer's written instructions on usage.

- **Sheeted film:** When used on a flat-bed inkjet printer, sheeted film may produce printing defects.
- **Ink limiting:** The recommended maximum ink limit is 250%.
- **If sheeted or stacked graphics will be stored:** If you plan to store sheeted and stacked finished graphics for an extended period of times, leave an unprinted margin (about 1/4 inch) to allow for possible shrinkage before trimming the graphic.

Do not exceed the recommended total ink coverage for the ink series used on this film. Having too high a total physical ink amount on the film results in media characteristic changes, incomplete drying, overlamine lifting, and/or poor graphic performance.

Completely Dry Graphics

IMPORTANT NOTE

Incomplete drying or curing can result in graphic failure including curling, increased shrinkage and adhesion failure, which are not covered under any 3M Graphic Warranty.

See the ink's 3M Product and Instruction Bulletin for more details.

Screen Printing

Formulations and processing conditions can affect ink durability. Refer to the Product and Instruction Bulletins for your ink for limitations and proper usage.

Cutting

See [3M Instruction Bulletin 4.1](#) for Sheeting, Scoring and Film Cutting details.

Graphic Protection

Graphic protection may improve the appearance, performance and durability of the graphic. Click on the graphic protection options listed in Product Bulletin or see the [3M Graphics Market Product Catalog](#), for more information.

IMPORTANT NOTE

During installation, scratches may occur on films without graphic protection.

Application and Installation

In addition to other 3M Bulletins specified in this document, the following Bulletins provide details that you may need to successfully apply a graphic.

- [3M Instruction Bulletin 4.22](#). Hot and Cold Roll Lamination for 3M Overlaminates.
- [3M Instruction Bulletin 5.1](#) Select and Prepare Substrates for Graphic Application
- [3M Instruction Bulletin 5.19](#). Lamination, Application & Maintenance of Floor Graphics. Complete the Surface Preparation procedure found in this Instruction Bulletin prior to applying a graphic to a surface.
- [3M Instruction Bulletin 5.5](#) Application, General Procedures for Interior and Exterior Dry Application
- [3M Instruction Bulletin 6.5](#) Storage, Handling, Maintenance, and Removal of Films and Sheetings

Pressure-sensitive Adhesive

This film has a pressure-sensitive adhesive. It bonds to the surface even with light pressure and cannot be repositioned.

Maintenance and Cleaning

Use a cleaner designed for high-quality painted surfaces. The cleaner must be wet, non-abrasive, without solvents, and have a pH value between 3 and 11 (neither strongly acidic nor strongly alkaline). See [3M Instruction Bulletin 6.5](#) for details.

Shelf Life, Storage and Shipping

Shelf Life

The shelf life is **never more than 2 years** from the date of manufacture on the original box.

If you process the film, the shelf life is changed to **1 year** from the processing date, but not later than the 2 year maximum from the manufacturing date.

Storage Conditions

- 90 °F (32 °C) maximum
- Out of sunlight
- Clean, dry area
- Original container
- Bring the film to print room temperature before using

Shipping Finished Graphics

Flat, or rolled printed side out on 5 inch (13 cm) or larger core. This helps prevent the liner, if used, from popping off.

Health and Safety



CAUTION

When handling any chemical products, read the manufacturer's container labels and the Safety Data Sheets (SDS) for important health, safety and environmental information. To obtain SDS sheets for 3M products go to 3M.com/SDS, or by mail or in case of an emergency, call 1-800-364-3577 or 1-651-737-6501.

When using any equipment, always follow the manufacturer's instructions for safe operation.

Bulletin Change Summary

For the most current 3M Technical Information available to successfully use this product, please view this Bulletin electronically and click on the blue underlined links to view the relevant documents.

Release J, NOV-2016:

- Updated Thickness. See "Physical Characteristics" on page 1.

3M Commercial
Solutions
3M Center
Building 220-12E-04
St. Paul, MN 55144-1000
Phone 1-888-328-3908
Web 3M.com/Graphics

3M Canada
PO Box 5757
London, ON N6A 4T1
1-800-265-1840
Fax 519-452-6245

3M México S.A. de C.V.
Av. Santa Fe No. 55
Col. Santa Fe, Del. Alvaro
Obregón
México D.F. 01210
General 5255-5270-0400
Fax 5255-5270-2277

3M Puerto Rico, Inc.
350 Chardon Avenue
Suite 1100
San Juan, PR 00918
General 787-620-3000
Fax 787-620-3018

3M and Scotchcal are trademarks of 3M Company. All other trademarks are the property of their respective owners.





Procurement Quality Clauses

A000 QUALITY CLAUSES NOT REQUIRED

Non-shippable items, for Dart Aerospace internal use only.

A001 STATISTICAL PROCESS CONTROL

The supplier must apply Statistical Process Control (SPC) to this purchase order. A (Cpk) of 1.33 or greater is required. Each shipment must be accompanied with a signed copy of the applicable SPC Control Plan(s). The Control Characteristic listed in SPC Control Plan shall be approved by DART AEROSPACE Quality Assurance prior to commencing with production / processing.

A002 FABRICATION INSPECTION SYSTEM (FIS) FAR21.303

The supplier's shall maintain a FIS in compliance with the requirements of FAR 21.303 (h). The FIS shall be approved and subject to audit by FAA, or its representative at any time.

A003 QUALITY SYSTEM SURVEILLANCE

As a DART AEROSPACE supplier manufacturing a product requiring DART AEROSPACE Customer and/or regulatory approval, the Seller's "Quality Control System" shall be subject to surveillance by DART AEROSPACE and the FAA.

A004 FAA-PMA /TSO

As a DART AEROSPACE supplier manufacturing an article or component for which DART AEROSPACE holds Supplemental Type Certificates (STC), your inspection system shall be subject to inspection by DART AEROSPACE at a level commensurate with criticalness of the article or component.

A005 RIGHT OF ENTRY

Allows DART AEROSPACE, its customers and regulatory agencies the right of access, through prior notification, to determine and verify the quality of work, applicable quality records and materials at all applicable area of all facilities, at any level of the supply chain, involved in the order.

A006 REQUIREMENTS FOR AIRWORTHINESS CERTIFICATION

Conformity Certification is required for articles specified on this purchase document. Include with each shipment, a true copy of Form One, Authorized Release Certificate, for Airworthiness. Foreign government equivalent to FAA Form 8130-3 is acceptable for imported articles.

A007 FIRST ARTICLE INSPECTION (FAI) BY SELLER, (DOCUMENTATION MAINTAINED BY SUPPLIER)

FAI shall be performed on all new or revised production manufactured items by seller at seller's facility. Results shall be documented on a report identified as "First Article Inspection Report" (FAIR). The report will be maintained at the seller's facility, and be available for review by Dart Aerospace when requested.

A008 FIRST ARTICLE INSPECTION (FAI) BY SELLER, (DOCUMENTATION SENT TO DART AEROSPACE)

FAI's shall be performed on all new or revised production manufactured items by seller at seller's facility. Results will be documented on a report identified as a "First Article Inspection Report" (FAIR). The identified first article unit and the FAIR will be sent to Dart Aerospace.



Procurement Quality Clauses

A009 FIRST ARTICLE INSPECTION (FAI) BY DART AEROSPACE AT SELLER'S FACILITY

FAI and/or test shall be accomplished at the Seller's facility before the balance of order may be shipped. DART AEROSPACE will conduct or witness inspections and/or tests and the results will be on a report form identified as "First Article Inspection Report".

A010 DART AEROSPACE SOURCE INSPECTIONS

Dart Aerospace inspection is required prior to shipment from your facility. Evidence of such inspection must be included in your packing documents accompanying each shipment. You must contact Dart Aerospace's buyer and establish verification arrangements and the method of product release. Drawings, inspection/test documents, and specifications, as applicable, covering material on this order shall be available for inspection at your facility.

A011 DELEGATIONS -SUPPLIER VERIFICATION OF DART AEROSPACE PRODUCT

The supplier has met the requirements established by DART AEROSPACE quality organization for the verification of DART product.

A012 CHEMICAL AND PHYSICAL TEST REPORTS

Each shipment must be accompanied by one (1) legible and reproducible copy of all chemical and physical test reports identifiable with materials ordered. The reports must contain the signature and title of the authorized representative of the agency performing the test and must assure conformance to specification requirements.

A013 SHELF LIFE CONTROLLED MATERIAL; 80% SHELF LIFE REQUIRED AT RECEIPT

Time sensitive material shall be furnished with a minimum of 80% of its shelf life remaining at date of shipment. Shelf life duration, date of manufacture and date of expiration shall be listed on material certification.

A014 SHELF LIFE CONTROLLED MATERIAL; 70% SHELF LIFE REQUIRED AT RECEIPT

Time sensitive material shall be furnished with a minimum of 70% of its shelf life remaining at date of shipment. Shelf life duration, date of manufacture and date of expiration shall be listed on material certification.

A015 SHELF LIFE CONTROLLED MATERIAL; 60% SHELF LIFE REQUIRED AT RECEIPT

Time sensitive material shall be furnished with a minimum of 60% of its shelf life remaining at date of shipment. Shelf life duration, date of manufacture and date of expiration shall be listed on material certification.

A016 PERSONNEL QUALIFICATION

Supplier shall ensure all employees performing quality sensitive tasks on Dart products are qualified to perform the task associated with the product and this information is available in their training records.



Procurement Quality Clauses

A017 RAW MATERIAL IDENTIFICATION (AS APPLICABLE)

A. Sheet or Plate Stock -Metallic or Non-Metallic

Each sheet or plate shipped shall be identified by continuous stenciling, of sufficient size to be readily legible, applied by permanent ink or dye of contrasting color, non-injurious to metal surfaces and not soluble.

B. Rod, Bar or Tube -all shapes -1/2 inch cross section or larger

Each length of Rod, Bar or Tube shipped shall be identified at one end or by continuous stenciling, of sufficient size to be readily legible, applied by permanent ink or dye of contrasting color, non-injurious to metal surfaces and not soluble in cutting and coolant oils. If continuous, spacing between groups of stencil letters shall not exceed twelve (12) inches. Information shall include material type or designation, material specification and temper.

C. Rod, Bar or Tube -all shapes -Smaller than 1/2 inch cross section

Rod, bar or tube shipped shall be bundled together; each bundle containing materials from the same (manufacturing/heat treatment) batch, and shall be identified as follows: An adhesive label or identification tag shall be securely attached to each bundle. This label or tag shall be permanently marked to indicate material type or designation, material specification and temper.

D. Castings / Forging -Ferrous or Non-Ferrous

Material shipped shall be identified with the part number, "melt" number, heat treat lot (if applicable) and serial number (if applicable). Identification of parts shall be in accordance with applicable drawings/specifications. Where drawings or specifications do not define method of identification, such identification shall be effected in accordance with MIL-STD-130.

E. Extrusions

Each length of extrusion shall be identified at one end or by continuous stenciling, of sufficient size to be readily legible, applied by permanent ink or dye of contrasting color, non-injurious to metal surfaces and not soluble in cutting and coolant oils. If continuous, spacing between groups of stencil letters shall not exceed twelve inches. Information shall include material type or designation, material specification, temper and heat lot number.

A018 ELECTRICAL EQUIPMENT

Each shipment shall be accompanied by one (1) legible and reproducible copy of a certificate containing the signature and title of the person authorizing the release of product. The certificate shall contain the part number, specification to which they conform, and general characteristic. When the parts are serialized, serial numbers shall be included on the certification. Manufacturer will maintain test reports, specification conformation and general characteristics on-site and available upon request.

A019 ELECTRICAL CABLES (WIRES)

Electrical cables shall be identified with the part number and manufacturing code. The spool, and Certificate of Conformance shall be identified per applicable standard/specification with the following information: standard / specification, size code, manufacturing year, country code (if applicable), and manufacturer.



Procurement Quality Clauses

A020 NON-DESTRUCTIVE TEST/INSPECTION IDENTIFICATION

All parts found to be acceptable by non-destructive testing methods are to be so identified by placing the proper acceptance test /inspection stamp on such acceptable parts. All parts found to be unacceptable are to be so identified by placing the proper withholding stamp on such defective parts. In those cases where NDT testing is being performed by a lower-tier supplier and his acceptance stamp is obliterated by further processing a copy of the lower-tier's certification must accompany shipment to DART AEROSPACE.

A021 DART AEROSPACE PROCESSING

Seller shall assure that any process and or non-destructive test (NDT) requested on this purchase order shall be performed only by sources currently appearing on the DART AEROSPACE's "List of Approved Vendors" for the specific type of work to be conducted.

A022 APICAL PROCESSING

Seller shall assure that any process work to be performed on Apical design and/or Part numbers by the Seller or its suppliers shall be performed only by sources noted in the latest published Apical Document Number MPP-120. MPP-120 Sources were used shall be submitted with AS9102 First Article Inspection Report and as requested by Dart Aerospace.

A023 IDENTIFICATION OF "DANGEROUS GOODS"

A "Dangerous Goods" decal must be applied to the outer container of the item being shipped and to the associated shipping document (shipper). Also, one copy of the applicable MSDS sheet must be provided with each shipment.

This is in addition to federal & provincial requirements noted in IATA & DOT CFR. It does not relieve the supplier of their responsibility to comply with any marking & labeling requirements set forth in the IATA & DOT CFR or any other legal documentation that may apply to this shipment.

A024 PROCESS CERTIFICATIONS

Each shipment shall be accompanied by one (1) legible and reproducible copy of a certificate that must include the signature and title of the person authorizing release of product certifying all processes used, such as heat treating, welding, NDT, surface preparation and treatment, etc. The certificate shall include the processing used, the specification to which they conform and the name of the agency that performed them if other than the seller (i.e. sub-vendor). When the parts are serialized, serial numbers shall be included on the certification.

A025 CERTIFICATE OF CONFORMANCE

Each shipment shall be accompanied by one (1) legible and reproducible copy of a Certification Document (Certificate of Conformance, Shipper, Packing List, etc.) that includes the identification (signature, electronic signature, stamp, etc.) of the person authorizing release of product assuring the items ordered were produced in accordance with and conforming in all respects with all applicable requirements set forth in Buyer's Standard Purchase Order Terms and Conditions and/or its contract



Procurement Quality Clauses

with Seller, including specifications, drawings, revision, marking requirements, physical item identification and electrical characteristics when applicable. When the parts are serialized, serial numbers shall be included on the certification.



Procurement Quality Clauses

A026 CERTIFICATION OF MATERIAL CONFORMANCE

Each shipment shall be accompanied by one (1) legible and reproducible copy of a Certification Document (Certificate of Conformance, Shipper, Packing List, etc.) that includes the identification (signature, electronic signature, stamp, etc. of the person authorizing release of product certifying each material used to fabricate the items ordered in this "Purchase Order".

A027 FLAMMABILITY TEST

Test reports showing actual results of flammability test which meet the requirements of FAR 25.853(a) and signed by a responsible party shall accompany this shipment.

A028 FLAMMABILITY TEST

Flammability Test reports showing actual results of flammability test(s). Reports must show Fire Worthiness resistance shall be such that the requirements of FAR 25.853 (a), Amendment 25-116 (60-Second Vertical Bunsen Burner Test). Appendix F, Part I will be met, or the latest revision of the Aircraft Materials Fire Test Handbook (DOT/FAA/AR-00/12).

A029 FLAMMABILITY TEST

Flammability Test reports verifying Smoke emission shall be such that the requirements of FAR 25.853 (d) Amendment 25-116. Appendix F, Part V will be met, or the latest revision of the Aircraft Materials Fire Test Handbook (DOT/FAA/AR00/12). Reports must include a brief description of the sample and mounting.

A030 FLAMMABILITY TEST

Flammability Test reports verifying Heat release capability shall be such that the requirements of FAR 25.853 (d), Amendment 25-116. Appendix F, Part IV will be met, or the latest revision of the Aircraft Materials Fire Test Handbook (DOT/FAA/AR-00/12). Reports must include a brief description of the sample and mounting.

A031 FLAMMABILITY TEST

Flammability Test reports showing actual test results of flammability tests which meet the requirements of FAR 25.856 (a) and AC25.856-1 or the latest revision of the Aircraft Materials Fire Test Handbook (DOT/FAA/AR-00/12).

A032 PUBLIC LAW 101-592 FASTENER QUALITY ACT

Supplier (Distributor) Certification: A Certification shall accompany each shipment of fasteners/washers, containing the following, as a minimum:

The manufacturer lot number(s) with associates part number(s); Manufacturers name; DART AEROSPACE P.O. number; and a statement to the effect that the manufactures certification (required by the Section 7 of the "Law") is on file with the distributor.

Supplier (Manufacturer) Certification: A Certification in accordance with Section 7 of the "Law" shall accompany each shipment.

Packaging: Each lot shall be packaged in a manner that ensures there will be no co-mingling of like fasteners from different lots in the same container.



Procurement Quality Clauses

Identification: Each package shall be identified with the lot number, name of the parts, part identification number, P.O. number and name of fastener manufacturer.



Procurement Quality Clauses

A033 STATEMENT OF CONFORMITY/TEST RECORDS FOR NAS, AN and MS FASTENERS

1. When supplier is the fastener manufacturer -Each shipment shall be accompanied by one (1) legible and reproducible copy of a certificate of conformance containing the signature and title of an authorized representative which stated that the fastener have been manufactured in accordance with requirements of the applicable NAS, AN, MS government approved Parts Standard and Procurement Specification; and the chemical / physical test reports required by the government approved Procurement Specification are on file with the manufacturer, and available for review by customer and /or government quality assurance representative upon request.

2. When the supplier is a distributor -Each shipment shall be accompanied by one (1) legible and reproducible copy of conformity to purchase order requirements. The statement of conformity as a minimum shall contain DART AEROSPACE P.O. number, packing slip number; a copy of applicable test records (chemical, physical, processes and NDT) required by the government approved Parts Standard and Procurement Specification are available, or are obtainable upon customer request. The statement of conformity must contain the name of the fastener manufacturer, and shall be signed and dated by an authorized representative.

A034 INTER COMPANY SHIPPERS

When products are shipped from one Dart Aerospace facility to another, the certification log number of the product being shipped must be recorded on the shipping document.

A035 OUT TIME REQUIREMENTS

Supplier must record the "out-time" of exposure sensitive material (pre-preg) on packing list.

A036 PRIORITY DX-A1

Priority DX-A1; This is a rated order certified for national defense use. You are required to follow all the provisions of Defense Priorities and Allocations System regulation (15 CFR 350).

A037 PRIORITY DO-A1

Priority DO-A1; This is a rated order certified for national defense use. You are required to follow all the provisions of the Defense Priorities and Allocations system regulation (15 CFR 350).

A038 AS9102 FIRST ARTICLE INSPECTION (FAI) BY SELLER, (DOCUMENTATION MAINTAINED BY SUPPLIER)

A FAI per AS9102 shall be performed on all new or revised manufactured items by the seller or at the seller's facility. Forms other than as identified in the Appendix of AS9102 must contain all required and conditionally required information and use same field reference numbers. Report is to be maintained at seller's facility and available for review at Dart Aerospace's request.

A039 AS9102 FIRST ARTICLE INSPECTION (FAI) BY SELLER, (DOCUMENTATION SENT TO DART AEROSPACE)

A FAI per AS9102 shall be performed on all new or revised manufactured items by the seller or at the seller's facility. Forms used other than as identified in the Appendix of AS9102 must contain all required



Procurement Quality Clauses

and conditionally required information and use same field reference numbers. The report will be sent to Dart Aerospace.



Procurement Quality Clauses

A040 NOTIFICATION OF QUALITY ESCAPE

Seller will report to Buyer if a product, article or part has been released from Seller or Seller's subcontractors or suppliers and subsequently found not to conform to the applicable design data.

A041 QUALITY MANAGEMENT SYSTEM

Supplier shall implement, document and maintain a Quality Management System in accordance with applicable requirements of AS9100 series standards or ISO9001 standard and additional requirements specified on Buyers contract or purchase order.

The Quality Management system shall be appropriate to the products the Supplier designs, manufactures, repairs or sells and shall cover all activities concerned by Dart Aerospace contracts or purchase orders.

A042 DART NOTIFICATION BY SUPPLIER

Supplier shall notify Dart of changes in product and / or process, change of supplier and changes of manufacturing facility locations.